


3/8" connections


CUBIC 15




TECHNICAL DATA..

Intake/delivery connections	G 3/8		
Air connection	G 3/8		
Max. dry suction capacity*	3 m		
Max. flow rate*	17 l/min		
Max. head*	70 m		
Max. air supply pressure	7 bar		
Max. diameter of passing solids (spherical particles)	0,5 mm		
Net weight	PP	1 Kg	(zone 2) 60°C Max temp.
	ECTFE	1,5 Kg	(zone 2) 95°C Max temp.
Construction materials	PP - ECTFE		

* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

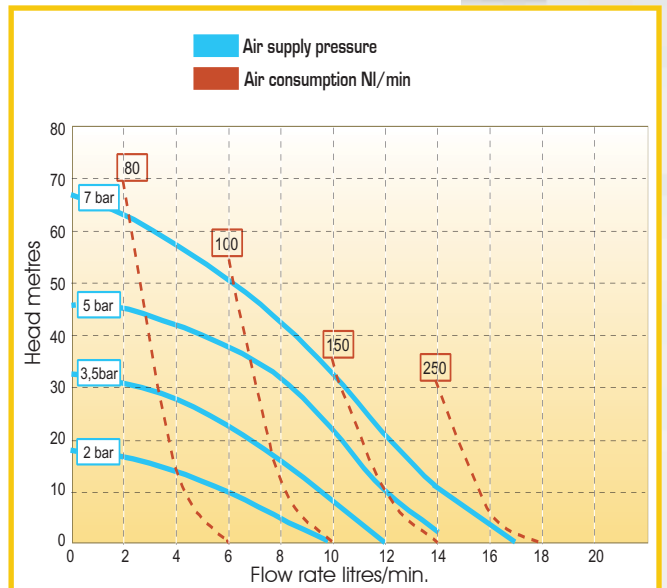

PERFORMANCE

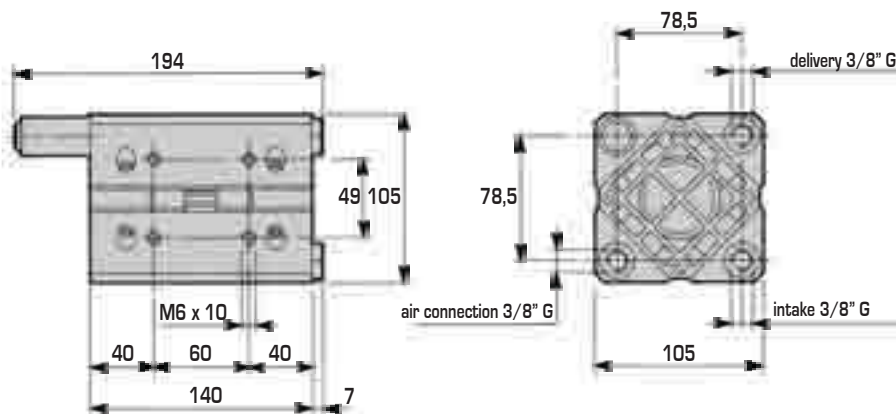

DIMENSIONS

The dimensions shown are in millimetres, are indicative and are not binding; ask for the specific drawing.